

Pogo Pin 160 mil / 4.0 mm

HIGHLIGHTS

Short, compact size

Board-to-board contacting

For use in charging units

MECHANICAL DATA

Center	4.00 mm/160 mil
Temperature range	-40 °C - +250 °C
Full travel	3.50 mm
Working travel	2.80 mm
Spring force at working travel	see high-temperature applications

ELECTRICAL DATA

Max. current rating	10.0 A
Typical continuity resistance	<= 10 mOhm

MATERIALS

Barrel	Brass, gold-plated
Spring	Stainless Steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Brass, gold-plated


RECOMMENDED DIAMETER OF DRILL

HP 2361.1 (trolitax)	2.64 mm
HGW 2372 (glass filled material)	2.65 mm

High-Temperature Applicationsen HIGH-TEMPERATURE APPLICATIONS

Temperature range	-40 °C - +250 °C
Pre-loaded spring force	0.25/ 0.30/ 0.45/ 0.50/ 1.00 N
Spring force at working travel (order index E)	0.80/ 1.20/ 1.50/ 2.50/ 3.50 N


TIP STYLE - DIAMETER - PLATING




C
2.30C Au
3.50C Au



D1
2.30C Au




D
2.30C Au



E
2.30C Au



F
2.30C Au




K2
2.30C Au


Serie	Collar Height X [mm]	Extension Height Y [mm]	Overall Length Z [mm]
5110/S	2.1	7.4	15.2
5110/4S	4.1	9.4	17.2
5110/S (Tip Style K2)	2.1	10.4	18.2

5110/4S (Tip Style K2)	4.1	12.4	20.2
------------------------	-----	------	------


5110/S
5110/4S

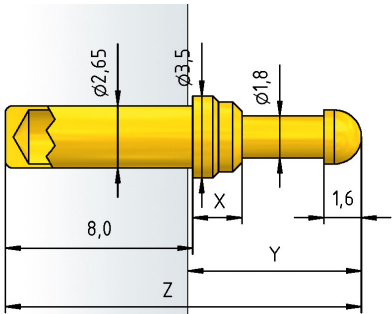


5110/S
5110/4S
(for Tip Style K2)

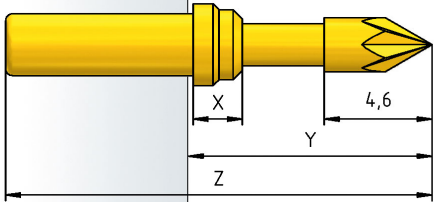


5110/S.02

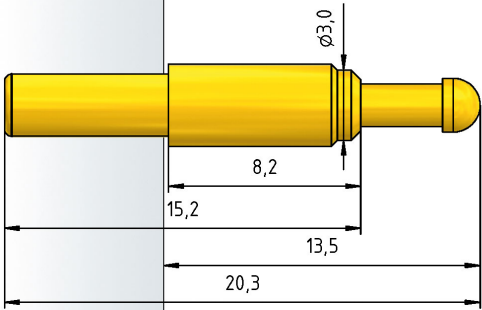

5110/1
(for Tip Style D1)

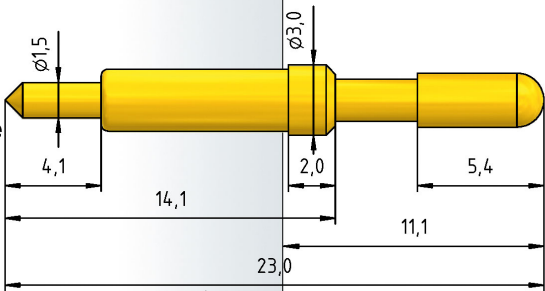

H 5110

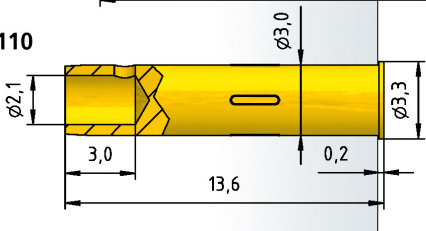



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // Series 5110/S

Pogo Pin 160 mil / 4.0 mm

HOW TO ORDER

5110/	4S	-	D	-	1.5 N	E	-	Au	-	2.3	C
1	2		3		4	5		6		7	8

1. Series 2. Variant 3. Tip Style
4. Spring Force 5. High Temperature 6. Tip Plating
7. Tip Diameter 8. Tip Material (only for CuBe)