



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // FRNT10

Push-In Type | Neutrally Disconnect Terminal Block

1 Connection



Wire Sizes

Solid min	1.5 mm ²
Solid max	10.0 mm ²
Stranded (flexible) min	1.5mm ²
Stranded (flexible) max	10.0 mm ²
Stranded with ferrule min	1.5 mm ²
Stranded with ferrule max	10.0 mm ²
Clamping range min	1.5mm ²
Clamping range max	10.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions

Stripped length	12.0 mm
Width	8.1 mm
Height	39.8 mm
Length	67.5 mm
Height TS35 x 7.5	40.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS

	BLUE, similar RAL 5015
---	------------------------

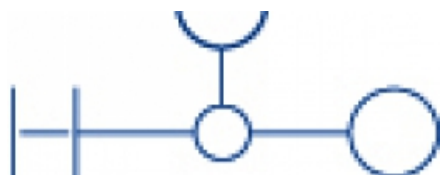
**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // FRNT10

Push-In Type | Neutrally Disconnect Terminal Block

1 Connection

CONNECTION DIAGRAM**ORDER DATA**

Article Designation	Article Number	PU
FRNT10-BLUE	43274.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate FAPI6-10/2A	493485.2	20
Cross-Connection insulated FIQI6-10/2	4917412.8	50
Cross-Connection insulated FIQI6-10/10	4917410.8	10
Cross-Connection uninsulated FIQI6-10/4	4917414.8	20
Cross-Connection insulated FIQI6-10/5	4917415.8	20
Cross-Connection insulated FIQI6-10/6	4917416.8	20
Cross-Connection insulated FIQI6-10/7	4917417.8	20
Cross-Connection insulated FIQI6-10/8	4917418.8	10
Cross-Connection insulated FIQI6-10/9	4917419.8	10
Cross-Connection insulated FIQI6-10/10	4917410.8	10
End Stopn ZES35/2	493811.2	50
Quick Labelling PSB8/40	499323.7	400

RATINGS

Ratings	UR	CSA	IEC
Rated voltage		600 V	250 V
Rated current		30 A	32 A
Rated wire size		AWG 22-10	10.0 mm ²
Rated impulse voltage			8 kV
Pollution degree			3