



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // FRSLD2.5

Push-In Type | Protective Conductor Clamp
4 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions


Stripped length	12.0 mm
Width	5.1 mm
Length	75.4 mm
Height TS35 x 7.5	53.0 mm
Height TS35 x 7.5 with labelling adapter	66.0 mm

ELECTRICAL DATA

General

Cross connection channels	2
---------------------------	---

COLOURS



GREEN/YELLOW



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // FRSLD2.5

Push-In Type | Protective Conductor Clamp

4 Connections

CONNECTION DIAGRAM

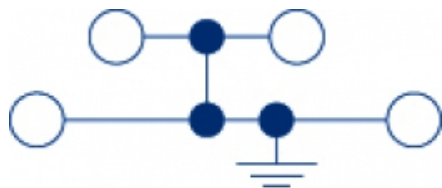

ORDER DATA

Article Designation	Article Number	PU
FRSLD2.5-GREEN/YELLOW	43236.2	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate FAPD2.5	493423.2	20
Labelling Adapters FBA1	493424.2	50
Four-Way Covers FAD2.5/4/B	493426.8	20
End Stopn ZES35/2	493811.2	50
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	cCSAus	IEC
Rated voltage		
Rated current		
Rated wire size	AWG 26-12	2.5 mm ²
Rated impulse voltage		6 kV
Pollution degree		3