



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // FRSli10

Push-In Type | Installation protective Conductor Clamp
2 Connections



Wire Sizes

Solid min	1.5 mm ²
Solid max	10.0 mm ²
Stranded (flexible) min	1.5mm ²
Stranded (flexible) max	10.0 mm ²
Stranded with ferrule min	1.5 mm ²
Stranded with ferrule max	10.0 mm ²
Clamping range min	1.5mm ²
Clamping range max	10.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions


Stripped length	12.0 mm
Width	8.1 mm
Height	39.8 mm
Length	56.5 mm
Height TS35 x 7.5	40.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS



GREEN/YELLOW



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // FRSLI10

Push-In Type | Installation protective Conductor Clamp

2 Connections

CONNECTION DIAGRAM

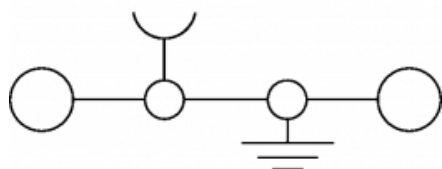

ORDER DATA

Article Designation	Article Number	PU
FRSLI10-GREEN/YELLOW	43280.2	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate FAPI6-10/2A	493485.2	20
End Stopn ZES35/2	493811.2	50
Quick Labelling PSB8/40	499323.7	400

RATINGS

Ratings	UR	CSA	IEC
Rated voltage			
Rated current			
Rated wire size	AWG 22-10	AWG 22-10	10.0 mm ²
Rated impulse voltage			8 kV
Pollution degree			3