



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // FRSLI4

Push-In Type | Installation protective Conductor Clamp
2 Connections



Wire Sizes

Solid min	0.5 mm ²
Solid max	6.0 mm ²
Stranded (flexible) min	0.6mm ²
Stranded (flexible) max	6.0 mm ²
Stranded with ferrule min	0.5 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.08mm ²
Clamping range max	6.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions


Stripped length	12.0 mm
Width	5.1 mm
Height	37.5 mm
Length	52.5 mm
Height TS35 x 7.5	38.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS



GREEN/YELLOW



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // **FRSLI4**

Push-In Type | Installation protective Conductor Clamp

2 Connections

CONNECTION DIAGRAM

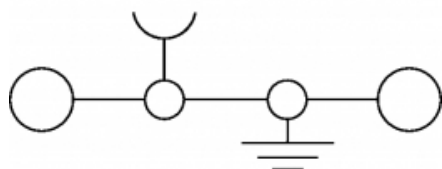

ORDER DATA

Article Designation	Article Number	PU
FRSLI4-GREEN/YELLOW	43279.2	100

ACCESSOIRES

Article Designation	Article Number	PU
Four-Way Covers FAD2.5/4/B	493426.8	20
End Stopn ZES35/2	493811.2	50
Quick Labelling PSB5/50	494600.7	500
Wire-End Ferrule für kleine Connectorräume H 4.0/20-D-SR	493194.0	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage			
Rated current			
Rated wire size	AWG 20-10	AWG 20-10	4.0 mm ²
Rated impulse voltage			8 kV
Pollution degree			3