



Technical Data // SR10-T35

Screw Type | Through Terminal Block
2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	10.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	10.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	10.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	10.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	10.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	12.0 mm
Width	8.0 mm
Length	48.0 mm
Height TS35 x 7.5	47.0 mm

ELECTRICAL DATA

General

Cross connection channels	1
Test pick off	1

**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // SR10-T35


Screw Type | Through Terminal Block

2 Connections

COLOURS

	WHITE, similar RAL 9010
	YELLOW, similar RAL 1023
	RED, similar RAL 3001
	BLACK, similar RAL 9011
	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015
	ORANGE, similar RAL 2003
	BROWN, similar RAL 8024
	GREY, similar RAL 7004

CONNECTION DIAGRAM

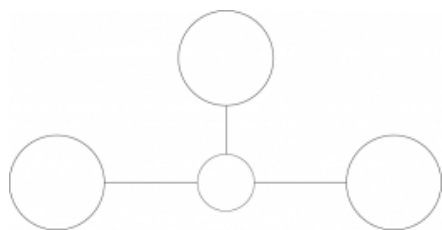

ORDER DATA

Article Designation	Article Number	PU
SR10-T35-BEIGE	41578.2	100
SR10-T35-BLUE	41578.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5-10	492001.2	50
Partition Plates TW2.5-10	492002.2	50
Insulation Plates TRS1	492003.2	100
Cross-Connection uninsulated Q2	492060.0	50
Cross-Connection insulated QI2	492750.2	50
Cross-Connection uninsulated Q3	492061.0	50
Cross-Connection insulated QI3	492751.2	50
Cross-Connection uninsulated Q4	492062.0	20
Cross-Connection insulated QI4	492752.2	20
Cross-Connection uninsulated Q10	492063.0	10
Cross-Connection insulated QI10	492753.2	10
End Stopn ES35/K/ST	492828.0	50
Test Adapter TA8/1/ST	492817.0	10
Quick Labelling PSB8/40	499323.7	400

Technical Data // SR10-T35

Screw Type | Through Terminal Block
2 Connections

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	600 V	600 V	800 V
Rated current	55 A	65 A	57 A
Rated wire size	AWG 22-8	AWG 22-8	10.0 mm ²
Rated impulse voltage			6 kV
Pollution degree			3