



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SR2.5-T15

Screw Type | Through Terminal Block
2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	7.0 mm
Width	5.0 mm
Length	26.0 mm
Height TS15	29.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

**PTR HARTMANN**

A Phoenix Mecano Company


Technical Data // SR2.5-T15

Screw Type | Through Terminal Block
2 Connections

COLOURS

	YELLOW, similar RAL 1023
	RED, similar RAL 3001
	BLACK, similar RAL 9011
	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015
	ORANGE, similar RAL 2003
	GREEN, similar RAL 6018
	WHITE, similar RAL 9010

CONNECTION DIAGRAM

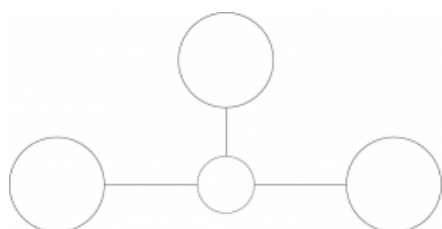

ORDER DATA

Article Designation	Article Number	PU
SR2.5-T15-BEIGE	41035.2	100
SR2.5-T15-BLUE	41035.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5/15	492427.2	50
Partition Plates TW2.5/15	492428.2	50
Uninsulated Wire-End Ferrule H2.5/12	492224.0	1000
Cross-Connection uninsulated Q3	492423.0	50
End Plate AP1.5-4	492738.2	50
Cross-Connection uninsulated Q10	492425.0	20
End Stopn ES15	492074.2	50
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	UR	CSA	IEC
Rated voltage	300 V	300 V	500 V
Rated current	15 A	20 A	24 A
Rated wire size	AWG 22-14	AWG 22-14	2.5 mm ²
Rated impulse voltage			6 kV
Pollution degree			3