




PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SR4-D

Screw Type | Through Terminal Block
2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	6.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	6.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	6.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	12.0 mm
Width	6.0 mm
Height	36.5 mm
Length	48.0 mm

ELECTRICAL DATA

General

Cross connection channels	1
Test pick off	1

COLOURS

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015


**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // SR4-D

Screw Type | Through Terminal Block

2 Connections

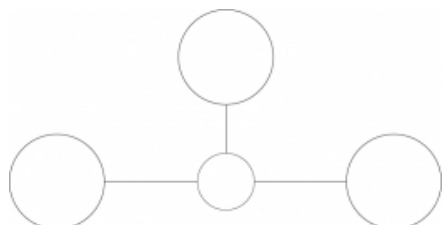CONNECTION DIAGRAM**ORDER DATA**

Article Designation	Article Number	PU
SR4-D-BEIGE	41388.2	100
SR4-D-BLUE	41388.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Supports EH4	492180.2	50
Cross-Connection insulated QI2	492740.2	50
External Cross-Connector insulated AQI2/6/17	492064.0	50
Cross-Connection insulated QI3	492741.2	50
External Cross-Connector insulated AQI3/6/17	492065.0	50
Cross-Connection insulated QI4	492742.2	20
External Cross-Connector insulated AQI4/6/17	492066.0	10
Cross-Connection insulated QI10	492743.2	10
External Cross-Connector insulated AQI10/6/17	492143.0	10
Covers AD1/6/B	492953.0	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	600 V	600 V	700 V
Rated current	32 A	32 A	32 A
Rated wire size	AWG 22-10	AWG 22-10	4.0 mm ²
Rated impulse voltage			6 kV
Pollution degree			3