



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SR4-T15

Screw Type | Through Terminal Block
2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	9.0 mm
Width	6.0 mm
Length	27.0 mm
Height TS15	34.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // SR4-T15


Screw Type | Through Terminal Block

2 Connections

COLOURS

	YELLOW, similar RAL 1023
	RED, similar RAL 3001
	BLACK, similar RAL 9011
	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015
	ORANGE, similar RAL 2003
	GREEN, similar RAL 6018
	WHITE, similar RAL 9010

CONNECTION DIAGRAM

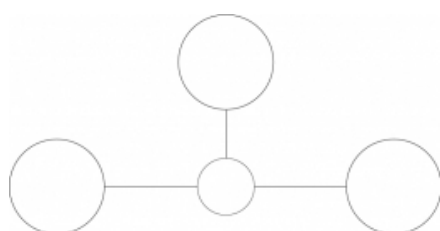

ORDER DATA

Article Designation	Article Number	PU
SR4-T15-BEIGE	41010.2	100
SR4-T15-BLUE	41010.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP1.5-4	492738.2	50
Partition Plates TW1.5-4	492071.0	50
Insulation Plates TRS3	492566.2	100
Cross-Connection uninsulated Q2	492087.0	50
Cross-Connection uninsulated Q3	492088.0	50
Cross-Connection uninsulated Q4	492089.0	20
Cross-Connection uninsulated Q10	492090.0	10
End Stopn ES15	492074.2	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	UR	CSA	IEC
Rated voltage	300 V	300 V	500 V
Rated current	30 A	40 A	32 A
Rated wire size	AWG 22-10	AWG 22-10	4.0 mm ²
Rated impulse voltage			6 kV
Pollution degree			3