

Technical Data // **SRD4-EL=D2**

Screw Type | Double-block clamp

4 Connections With electronic components



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	9.0 mm
Width	6.0 mm
Length	60.2 mm
Height TS35 x 7.5	61.0 mm
Height TS32	65.5 mm

ELECTRICAL DATA

General

Cross connection channels	2
Test pick off	1

Electronic components

Rated voltage AC	400 V
Rated current	10 A

Diodes

Diode type	1N4007
Diode reverse voltage	1.000 V
Diode current	1 A

Rated wire size	4.0 mm ²
AWG rated wire size	AWG 22-12



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRD4-EL=D2

Screw Type | Double-block clamp


4 Connections With electronic components

COLOURS

 BEIGE, similar RAL 1019

 BLUE, similar RAL 5015

CONNECTION DIAGRAM

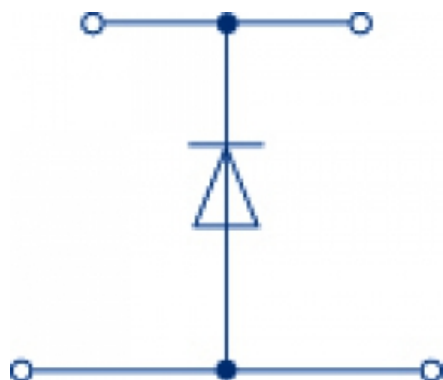

ORDER DATA

Article Designation	Article Number	PU
SRD4-EL=D2-BEIGE	41047.2	100
SRD4-EL=D2-BLUE	41047.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP4	492101.2	20
Insulation Plates TRS3	492566.2	100
Socket Plug STB8.5/2.3	492075.0	50
Test Plug PS2.3	492007.0	20
Cross-Connection uninsulated Q2	492087.0	50
Cross-Connection uninsulated Q3	492088.0	50
Cross-Connection uninsulated Q4	492089.0	20
Cross-Connection uninsulated Q10	492090.0	10
End Stopn ES35/K/ST	492828.0	50
Test Adapter TAD6/1/5	492822.0	10
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings

Rated voltage

Rated current

Rated wire size