




PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRD4-G

Screw Type | Through Terminal Block
2x2 Connections

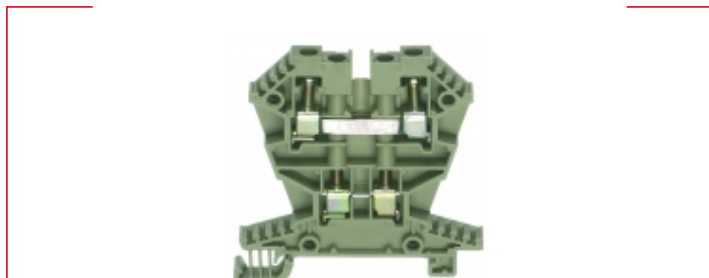

Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	9.0 mm
Width	6.0 mm
Length	58.5 mm
Height TS35 x 7.5	60.0 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // SRD4-G

Screw Type | Through Terminal Block

2x2 Connections

CONNECTION DIAGRAM

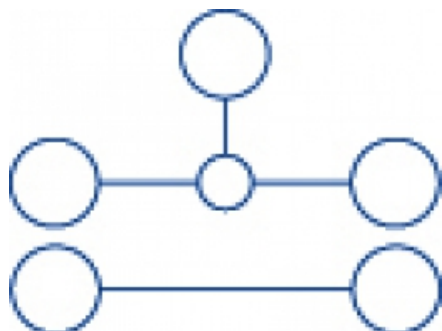

ORDER DATA

Article Designation	Article Number	PU
SRD4-G-BEIGE	42584.2	100
SRD4-G-BLUE	42584.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate APG4	492586.2	20
Cross-Connection uninsulated Q2	492087.0	50
Cross-Connection uninsulated Q3	492088.0	50
Cross-Connection uninsulated Q4	492089.0	20
Cross-Connection uninsulated Q10	492090.0	10
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	300 V	300 V	500 V
Rated current	30 A	30 A	32 A
Rated wire size	AWG 22-12	AWG 22-12	4.0 mm ²
Rated impulse voltage			6 kV
Pollution degree			3