



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRD4-V-800

Screw Type | Through Terminal Block
2x2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	4.0 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	9.0 mm
Width	7.5 mm
Length	60.2 mm
Height TS35 x 7.5	61.0 mm
Height TS32	65.5 mm



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRD4-V-800


Screw Type | Through Terminal Block

2x2 Connections

COLOURS

 BEIGE, similar RAL 1019

CONNECTION DIAGRAM

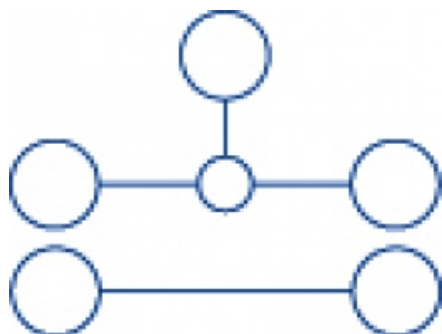

ORDER DATA

Article Designation	Article Number	PU
SRD4-V-800-BEIGE	41026.2	80

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP4-800V	492159.2	20
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	UR	CSA	IEC
Rated voltage	600 V	600 V	800 V
Rated current	30 A	30 A	32 A
Rated wire size	AWG 22-12	AWG 22-12	4.0 mm ²
Rated impulse voltage			6 kV
Pollution degree			3