



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRDIS2.5-PE-L-L

Screw Type | 3-wire Installation Clamp

5 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	8.0 mm
Width	6.0 mm
Length	90.5 mm
Height TS35 x 7.5	53.0 mm

ELECTRICAL DATA

General

Cross connection channels	2
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
---	-------------------------



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // SRDIS2.5-PE-L-L

Screw Type | 3-wire Installation Clamp

5 Connections

CONNECTION DIAGRAM

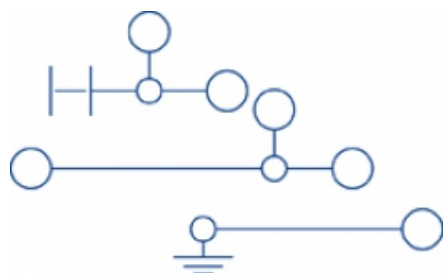

ORDER DATA

Article Designation	Article Number	PU
SRDIS2.5-PE-L-L-BEIGE	41412.2	50

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5-S	492829.2	20
Insulation Plates TRS3	492566.2	100
Cross-Connection uninsulated Q2	492832.0	50
Cross-Connection uninsulated Q3	492833.0	50
Cross-Connection uninsulated Q4	492834.0	20
Cross-Connection uninsulated Q10	492835.0	10
Cross-Connection uninsulated Q20	492836.0	10
Cross-Connection uninsulated Q0.5m/83	492154.0	1
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	cURus	IEC
Rated voltage		400 / 250 V
Rated current		24 A
Rated wire size	AWG 22-14	2.5 mm ²
Rated impulse voltage		4 kV
Pollution degree		3