

Technical Data // SRDIS2.5-PE-L-NT

Screw Type | 3-wire Installation Clamp

36 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	8.0 mm
Width	6.0 mm
Length	90.5 mm
Height TS35 x 7.5	53.0 mm

ELECTRICAL DATA

General

Cross connection channels	2
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
---	-------------------------

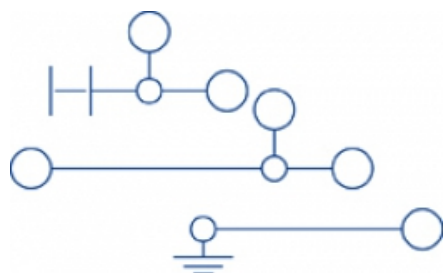
**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // SRDIS2.5-PE-L-NT

Screw Type | 3-wire Installation Clamp

36 Connections

CONNECTION DIAGRAM**ORDER DATA**

Article Designation	Article Number	PU
SRDIS2.5-PE-L-NT-BEIGE	41410.2	50

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5-S	492829.2	20
Support plate HP-SRDIS	492890.5	20
Insulation Plates TRS3	492566.2	100
Busbar Ssch10x3-MS	492128.0	1 m
Busbar Ssch10x3-CU	492129.0	1 m
Cross-Connection uninsulated Q2	492832.0	50
Cross-Connection uninsulated Q3	492833.0	50
Cross-Connection uninsulated Q4	492834.0	20
Cross-Connection uninsulated Q10	492835.0	10
Cross-Connection uninsulated Q20	492836.0	10
Cross-Connection uninsulated Q0.5m/83	492154.0	1
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	IEC
Rated voltage	400 / 250 V
Rated current	24 A
Rated wire size	AWG 22-14 2.5 mm ²
Rated impulse voltage	4 kV
Pollution degree	3