




PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRFNAB2.5

Screw Type | Five-wire network connection block

10 Connections

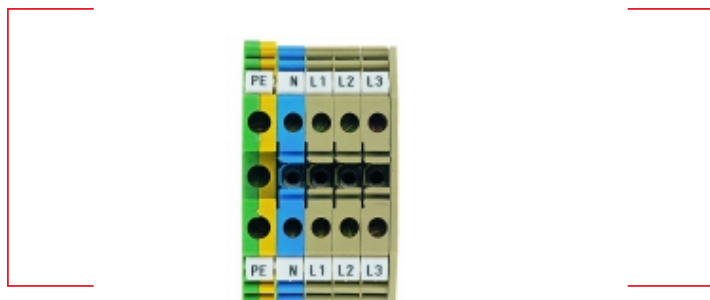

Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	7.0 mm
Width	28.0 mm
Length	52.0 mm
Height TS35 x 7.5	47.0 mm

ELECTRICAL DATA

General

Cross connection channels	1
Test pick off	4

COLOURS



MULTI COLOUR

**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // SRFNAB2.5

Screw Type | Five-wire network connection block

10 Connections

CONNECTION DIAGRAM**ORDER DATA**

Article Designation	Article Number	PU
SRFNAB2.5-MULTI COLOUR	41523.2	10

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5-10	492001.2	50
Partition Plates TW2.5-10	492002.2	50
Insulation Plates TRS3	492566.2	100
Cross-Connection uninsulated Q2	492567.0	50
Cross-Connection uninsulated Q3	492568.0	50
Cross-Connection uninsulated Q4	492569.0	20
Cross-Connection uninsulated Q10	492570.0	10
End Stopn ES35/K/ST	492828.0	50
Test Adapter TA5/1/ST	492812.0	10
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	UR		IEC
Rated voltage	600 V	600 V	800 V
Rated current	20 A	20 A	24 A
Rated wire size	AWG 22-14	AWG 22-14 AWG 22-12	2.5 mm ²
Rated impulse voltage			8 kV
Pollution degree			3