




PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRID2.5-F/Q

Screw Type | Through Terminal Block
3x2 Connections



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	7.0 mm
Width	5.0 mm
Length	84.8 mm
Height TS35 x 7.5	58.3 mm
Height TS32	62.8 mm

ELECTRICAL DATA

General

Cross connection channels	3
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
---	-------------------------

**PTR HARTMANN**


A Phoenix Mecano Company

Technical Data // SRID2.5-F/Q

Screw Type | Through Terminal Block

3x2 Connections

CONNECTION DIAGRAM

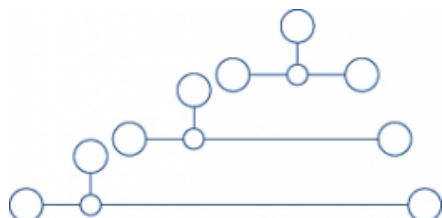

ORDER DATA

Article Designation	Article Number	PU
SRID2.5-F/Q-BEIGE	42269.2	50

ACCESSOIRES

Article Designation	Article Number	PU
End Plate AP2.5/ID	492699.2	20
Uninsulated Wire-End Ferrule H2.5/12	492224.0	1000
Cross-Connection uninsulated Q3	492423.0	50
End Plate AP1.5-4	492738.2	50
Cross-Connection uninsulated Q10	492425.0	20
End Stopn ES35/K/ST	492828.0	50
Socket Plug STB8.5/2.3	492075.0	50
Test Plug PS2.3	492007.0	20
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	300 V	300 V	250 V
Rated current	20 A	20 A	24 A
Rated wire size	AWG 22-14	AWG 22-14	2.5 mm ²
Rated impulse voltage			4 kV
Pollution degree			3