



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // SRM4

Screw Type | Through Terminal Block

2 Connections Direct mounting



Wire Sizes

Solid min	0.2 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.2mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.2 mm ²
Stranded with ferrule max	2.5 mm ²
Clamping range min	0.2mm ²
Clamping range max	4.0 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-2

Temperatures

Working temperature	-40 - 105 °C
---------------------	--------------

Dimensions

Stripped length	9.0 mm
Width	6.0 mm
Height	27.5 mm
Length	27.0 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015

**PTR HARTMANN**


A Phoenix Mecano Company

Technical Data // SRM4

Screw Type | Through Terminal Block

2 Connections Direct mounting

CONNECTION DIAGRAM

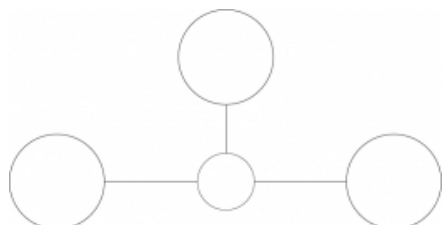

ORDER DATA

Article Designation	Article Number	PU
SRM4-BEIGE	41018.2	100
SRM4-BLUE	41018.5	100

ACCESSOIRES

Article Designation	Article Number	PU
End Supports EH1	492135.2	50
Cross-Connection uninsulated Q2	492087.0	50
Cross-Connection uninsulated Q3	492088.0	50
Cross-Connection uninsulated Q4	492089.0	20
Cross-Connection uninsulated Q10	492090.0	10
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	UR	IEC
Rated voltage	300 V	500 V
Rated current	20 A	32 A
Rated wire size	AWG 22-12	4.0 mm ²
Rated impulse voltage		4 kV
Pollution degree		3