

THR04SL







PTR HARTMANN

A Phoenix Mecano Company



- With ground pin
- Possible with | without embossed pins
- Reflow soldering

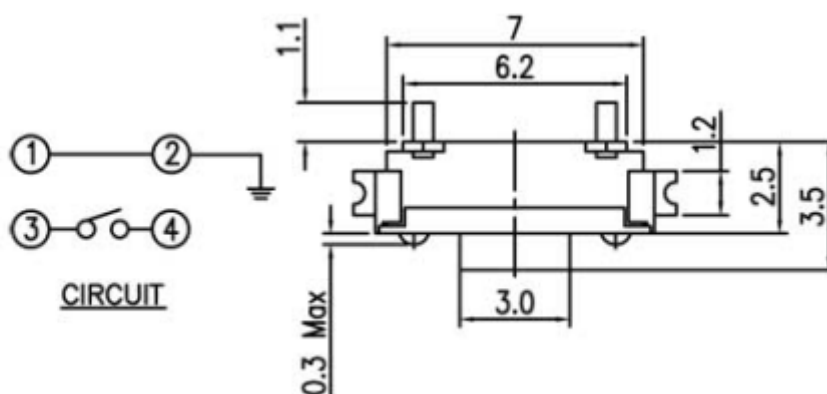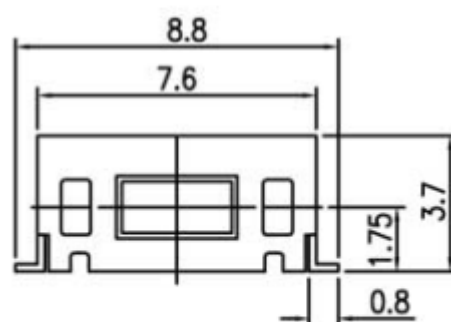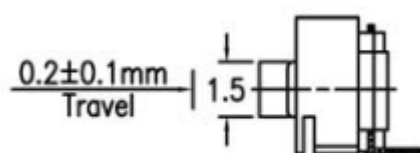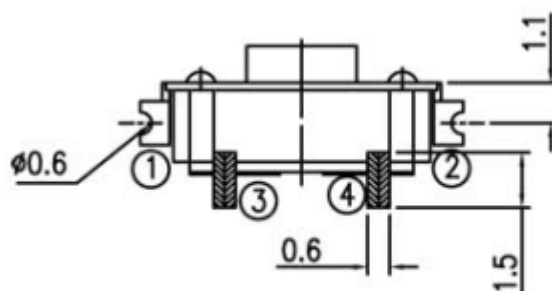

Mechanical Data	Electrical Data	Material
-----------------	-----------------	----------

Fixation mode	SMT
Type	vertical
Actuation direction	horizontal
Travel	0.2 mm ± 0.1 mm
Length	7.6 mm
Height	3.7 mm
Width	2.5 mm
Perm. ambient temperature	-40 °C ... +85 °C
Perm. storage temperature	max. 30 °C
Reflow soldering	max. 260 °C

Mechanical Data	Electrical Data	Material
-----------------	-----------------	----------

Rating	12.0 VDC / 50.0 mA
Contact resistance	< 100.0 mΩ
Insulation resistance	> 100.0 MΩ
Test voltage	250.0 VAC / 1.0 min

Mechanical Data	Electrical Data	Material
-----------------	-----------------	----------

Housing	PA46
Pin plating	Bronze, Ag plated
Metal cover	Brass (C2680), Ag plated
Dome	Stainless steel (SUS), Ag plated