

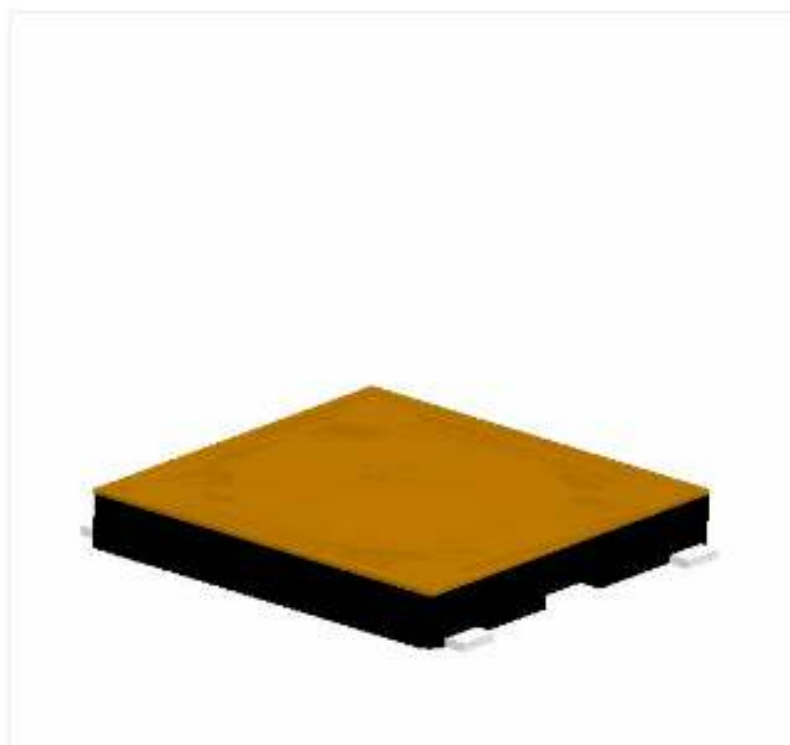


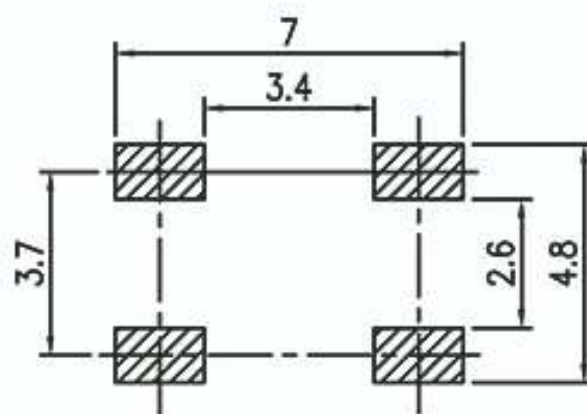

- Only 0.6 mm height
- Without actuator
- Reflow soldering acc. JDEC J-STD-020E

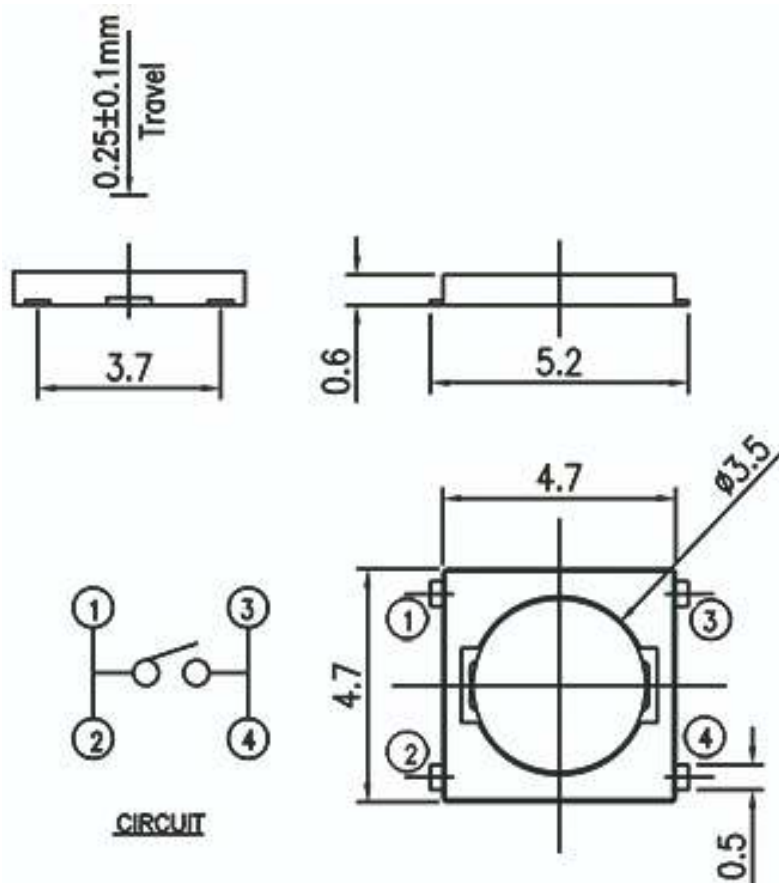

P.C.B. LAYOUT
TOP VIEW

Mechanical Data	Electrical Data	Material
Fixation mode	SMT	
Type	horizontal	
Actuation direction	vertical	
Travel	0.25 mm ± 0.1 mm	
Length	4.7 mm	
Width	4.7 mm	
Perm. ambient temperature	-40 °C ... +85 °C	
Perm. storage temperature	max. 30 °C	
Reflow soldering	JDEC J-STD-020 E	

Mechanical Data	Electrical Data	Material
Rating	12.0 VDC / 50.0 mA	
Contact resistance	< 100.0 mΩ	
Insulation resistance	> 100.0 MΩ	
Test voltage	250.0 VAC / 1.0 min	

Mechanical Data	Electrical Data	Material
Housing	LCP	
Pin plating	Bronze, Ag plated	
Film	Polyimide, orange	
Dome	Phosphor bronze (C5210), Ag plated	