
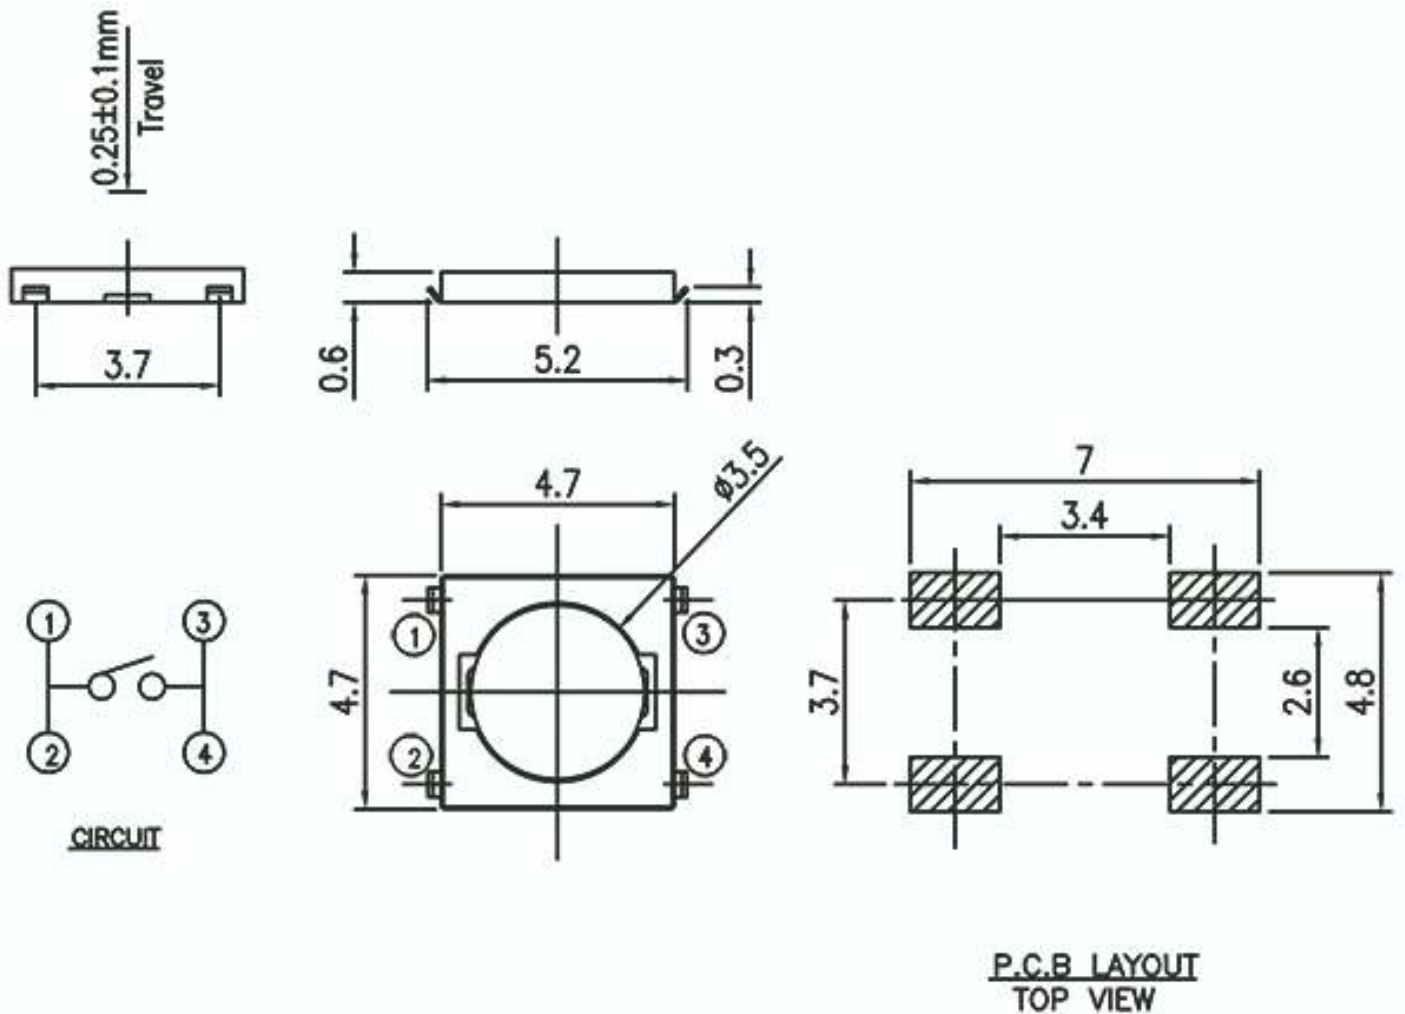


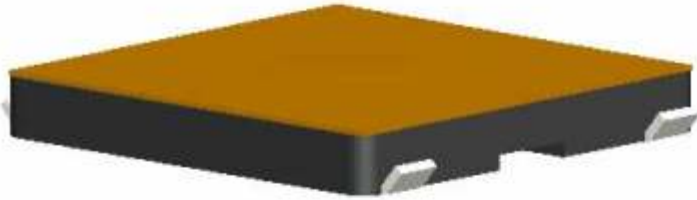

Mechanical Data**Electrical Data****Material**

Fixation mode	SMT
Type	horizontal
Actuation direction	vertical
Travel	0.25 mm ± 0.1 mm
Length	4.7 mm
Width	4.7 mm
Perm. ambient temperature	-40 °C ... +85 °C
Perm. storage temperature	max. 30 °C
Reflow soldering	JDEC J-STD-020 E

Mechanical Data**Electrical Data****Material**

Rating	12.0 VDC / 50.0 mA
Contact resistance	< 100.0 mΩ
Insulation resistance	> 100.0 MΩ
Test voltage	250.0 VAC / 1.0 min

Mechanical Data**Electrical Data****Material**

Housing	LCP
Pin plating	Bronze, Ag plated
Film	Polyimide, orange
Dome	Phosphor bronze (C5210), Ag plated