



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // ZRI1.5/3-B-LED(RD)

Tension Spring Type | Initiator / actuator clamp

4 ConnectionsBlock design



Wire Sizes

Solid min	0.5 mm ²
Solid max	2.5 mm ²
Stranded (flexible) min	0.5mm ²
Stranded (flexible) max	2.5 mm ²
Stranded with ferrule min	0.5 mm ²
Stranded with ferrule max	1.5 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions

Width	5.1 mm
Length	68.7 mm
Height TS35 x 7.5	40.5 mm

ELECTRICAL DATA

General

Cross connection channels	1
---------------------------	---

COLOURS

	BEIGE, similar RAL 1019
---	-------------------------

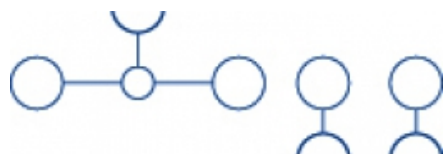
**PTR HARTMANN**

A Phoenix Mecano Company

Technical Data // ZRI1.5/3-B-LED(RD)

Tension Spring Type | Initiator / actuator clamp

4 ConnectionsBlock design

CONNECTION DIAGRAM**ORDER DATA**

Article Designation	Article Number	PU
ZRI1.5/3-B-LED(RD)-BEIGE	43531.2	50

ACCESSOIRES

Article Designation	Article Number	PU
End Plate ZAP/TW ZRI1.5/3	493746.2	20
Labelling Adapters ZBA2	493786.2	50
Labelling Adapters ZBA2/Z	493787.2	50
Potential Distribution Strip ZPL1.5	493738.2	100
Potential Distribution Strip ZPL1.5-PE	493743.2	100
Cross-Connection insulated ZQI2.5/2	493710.8	50
Cross-Connection insulated ZQI2.5/0.5/99	493719.8	1
End Stopn ZES35	493748.2	50
Test Adapter ZTA1.5	4917034.2	10
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	300 V	300 V	400 V
Rated current	12.5 A	12.5 A	17.5 A
Rated wire size	AWG 26-14	AWG 26-14	1.5 mm ²
Rated impulse voltage			4 kV
Pollution degree			3