



PTR HARTMANN

A Phoenix Mecano Company

Technical Data // ZRMA2.5

Tension Spring Type | Motor connection terminal
3x2+1 Connections



Wire Sizes

Solid min	0.5 mm ²
Solid max	4.0 mm ²
Stranded (flexible) min	0.5mm ²
Stranded (flexible) max	4.0 mm ²
Stranded with ferrule min	0.5 mm ²
Stranded with ferrule max	2.5 mm ²

Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

Dimensions

Width	5.1 mm
Length	103.5 mm
Height TS35 x 7.5	73.0 mm

ELECTRICAL DATA

General

Test pick off	6
---------------	---

COLOURS

 BEIGE, similar RAL 1019

 BLUE, similar RAL 5015

**PTR HARTMANN**


A Phoenix Mecano Company

Technical Data // ZRMA2.5

Tension Spring Type | Motor connection terminal

3x2+1 Connections

CONNECTION DIAGRAM

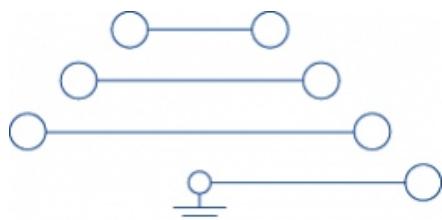

ORDER DATA

Article Designation	Article Number	PU
ZRMA2.5-BEIGE	43582.2	50
ZRMA2.5-BLUE	43582.5	50

ACCESSOIRES

Article Designation	Article Number	PU
End Plate ZAP-VMAC	493762.2	20
External Cross-Connector insulated AQ12/5/15	492023.0	50
External Cross-Connector insulated AQ13/5/15	492024.0	50
Four-Way Covers ZAD2.5/4/B	493706.0	20
Labelling Adapters ZBA3	493813.2	50
End Stopn ZES35	493748.2	50
Test Adapter ZTA2.5	493740.2	10
Quick Labelling PSB5/50	494600.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage	300 V	300 V	400 V
Rated current	15 A	15 A	24 A
Rated wire size	AWG 20-12	AWG 20-12	2.5 mm ²
Rated impulse voltage			6 kV
Pollution degree			3