

Technical Data // ZRSL4-DR

Tension Spring Type | Protective Conductor Clamp

3 Connections




Wire Sizes	
Solid min	0.5 mm ²
Solid max	6.0 mm ²
Stranded (flexible) min	0.6mm ²
Stranded (flexible) max	6.0 mm ²
Stranded with ferrule min	0.5 mm ²
Stranded with ferrule max	4.0 mm ²

Insulating Material	
Material	PA 6.6
Flammability class	UL 94 V-0

Temperatures	
Working temperature	-40 - 120 °C

Dimensions	
Width	6.1 mm
Length	78.5 mm
Height TS35 x 7.5	42.0 mm

ELECTRICAL DATA	
General	
Test pick off	2

COLOURS	
	GREEN/YELLOW



PTR HARTMANN


A Phoenix Mecano Company

Technical Data // ZRSL4-DR

Tension Spring Type | Protective Conductor Clamp

3 Connections

CONNECTION DIAGRAM

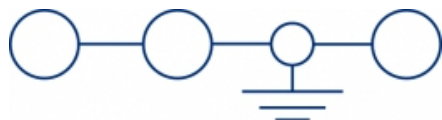

ORDER DATA

Article Designation	Article Number	PU
ZRSL4-DR-GREEN/YELLOW	43526.2	100

ACCESSOIRES

Article Designation	Article Number	PU
End Plate ZAP4/3A	493704.2	50
Four-Way Covers ZAD4/4/B	493707.0	20
End Stopn ZES35	493748.2	50
Test Adapter ZTA4	493741.2	10
Quick Labelling PSB6/50	494702.7	500

RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage			
Rated current			
Rated wire size	AWG 20-10	AWG 20-10	4.0 mm ²
Rated impulse voltage			8 kV
Pollution degree			3